




d	l	d1	g	e	h
4	16	11	2,3	22,0	10,0
4	25	11	2,3	22,0	10,0
5	25	11	2,3	22,0	11,0
6	25	15	2,5	26,0	14,0
6	30	15	2,5	26,0	14,0
8	40	15	3,3	30,0	16,0
10	20	19,5	4,0	35,3	20,0
10	40	19,5	4,0	35,3	20,0
12	40	25	5,0	47,5	25,0

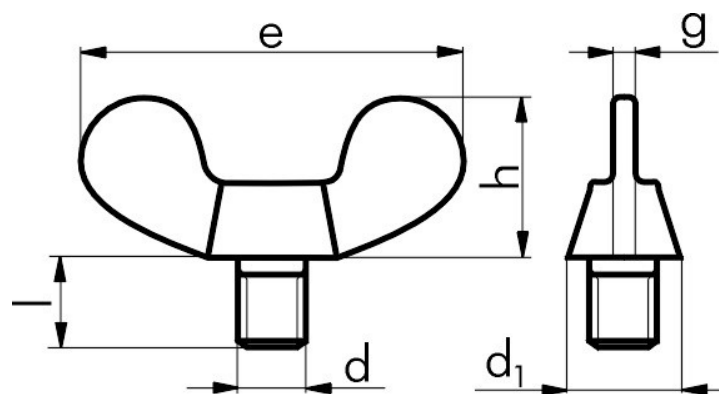

Śruba skrzydełkowa DIN 265, stal ocynkowana galwanicznie, stal nierdzewna A2.